

PCT/PTO-1590 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

112740-344

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/009858

INTERNATIONAL APPLICATION NO.

PCT/DE00/01021

INTERNATIONAL FILING DATE

03 April 2000

PRIORITY DATE CLAIMED

22 April 1999

TITLE OF INVENTION

METHOD FOR CONTROLLING TRANSMISSION POWER IN A RADIO SYSTEM, AND A CORRESPONDING RADIO SYSTEM

APPLICANT(S) FOR DO/EO/US

Bernhard Raaf

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☒ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☒ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☒ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Submission of Drawings Figures 1-3 on two sheets

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR) <div style="font-size: 24pt; font-weight: bold;">10/009858</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold;">PCT/DE00/01021</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">112740-344</div>
---	---	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :				CALCULATIONS PTO USE ONLY																										
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO				\$1040.00																										
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO				\$890.00																										
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO				\$740.00																										
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)				\$710.00																										
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)				\$100.00																										
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00																										
Surcharge of \$130.00 for furnishing the oath or declaration later than _____ months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00																										
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:20%;">RATE</th> <th style="width:20%;"></th> </tr> <tr> <td>Total claims</td> <td>24 - 20 =</td> <td>4</td> <td>x \$18.00</td> <td>\$72.00</td> </tr> <tr> <td>Independent claims</td> <td>2 - 3 =</td> <td>0</td> <td>x \$84.00</td> <td>\$0.00</td> </tr> <tr> <td colspan="4">Multiple Dependent Claims (check if applicable).</td> <td>\$0.00</td> </tr> <tr> <td colspan="4" style="text-align: center;">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$962.00</td> </tr> </table>				CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		Total claims	24 - 20 =	4	x \$18.00	\$72.00	Independent claims	2 - 3 =	0	x \$84.00	\$0.00	Multiple Dependent Claims (check if applicable).				\$0.00	TOTAL OF ABOVE CALCULATIONS =				\$962.00		
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																											
Total claims	24 - 20 =	4	x \$18.00	\$72.00																										
Independent claims	2 - 3 =	0	x \$84.00	\$0.00																										
Multiple Dependent Claims (check if applicable).				\$0.00																										
TOTAL OF ABOVE CALCULATIONS =				\$962.00																										
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00																										
SUBTOTAL =				\$962.00																										
Processing fee of \$130.00 for furnishing the English translation later than _____ months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00																										
TOTAL NATIONAL FEE =				\$962.00																										
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).				\$0.00																										
TOTAL FEES ENCLOSED =				\$962.00																										
				Amount to be refunded	\$																									
				charged	\$																									

- a. ☒ A check in the amount of \$962.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-1818. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

William E. Vaughan (Reg. No. 39,056)
 Bell, Boyd & Lloyd LLC
 P.O. Box 1135
 Chicago, Illinois 60690-1135
 (312) 807-4292

SIGNATURE

William E. Vaughan

NAME

39,056

REGISTRATION NUMBER

October 22, 2001

DATE

IN THE UNITED STATES ELECTED/DESIGNATED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

APPLICANT: Bernhard Raaf DOCKET NO: 112740-344
SERIAL NO: GROUP ART UNIT:
EXAMINER:

10 INTERNATIONAL FILING DATE: 03 April 2000

15 Assistant Commissioner for Patents,
Washington, D.C. 20231

Please amend the above-identified International Application before entry

20 into the National stage before the U.S. Patent and Trademark Office under 35
U.S.C. §371 as follows:

Please replace the Specification of the present application, including the
ct, with the following Substitute Specification:

TITLE OF THE INVENTION

METHOD FOR CONTROLLING TRANSMISSION POWER IN A RADIO SYSTEM, AND A CORRESPONDING RADIO SYSTEM

30 The present invention relates to a method for controlling the transmission power in a radio system, and to a corresponding radio system, in particular a corresponding mobile radio system.

Transmission power control in mobile radio systems is an important performance feature in order to be able to suppress possible interference between

the individual connections and, hence, to allow the capacity and quality of the connections to be improved, as well as to be able to reduce the mean transmission power, to achieve the best possible matching to the requirements and to allow losses via the transmission channels to be at least partially compensated for.

5 To this end, the signal transmitted by a transmitter is evaluated at the receiving end in the mobile radio system in order to allow information to be produced as a function of this for power control, and to allow this information to be transmitted to the transmitter, which then adjusts the transmission power in accordance with the power control information.

10 In order to explain the principle of power control in more detail, Figure 2 shows the communication between a base station 1 and a mobile station 2 in a mobile radio system. A connection from the base station 1 to the mobile part 2 is referred to as the downlink or forward link connection, while a connection from the mobile part 2 to the base station 1 is referred to as the uplink connection, or reverse
15 link connection. For power control in the downlink, the respective received signal is evaluated in the mobile station 2, and power control information is produced as a function of this and sent back to the base station 1, so that the base station 1 can adjust the transmission power appropriately. In order to control the uplink, the received signal is evaluated in the base station 1, where the power
20 control information is produced and the mobile station 2 is instructed to carry out power matching.

The power control information is, in this case, transmitted within a predetermined frame structure, depending on the respective mobile radio system.

Figure 3 shows an example of the frame and timeslot structure for a
25 downlink connection in a mobile radio system operated using a code division multiple access method (CDMA). The frame and timeslot structure shown in Figure 3 corresponds, in particular, to a UMTS mobile radio channel (Universal Mobile Telecommunications System), which is also referred to as DPCH (Dedicated Physical Channel) in accordance with the current state of UMTS standardization.
30 UMTS is the designation for third-generation mobile radio systems, with the aim of a worldwide, universal mobile radio standard. According to the UMTS mobile

radio standard, the WCDMA method (Wideband Code Division Multiple Access) is intended for use as the multiple access method.

The frame structure shown in Figure 3 and with a duration of 720 ms includes, in particular, 72 frames 3 of identical construction and having a frame duration of 10 ms, with each frame, in turn, having 16 timeslots 4, with a timeslot duration of 0.625 ms. Each timeslot 4 includes information split between a logical control channel (DPCCH, Dedicated Physical Control Channel) and a logical data channel (DPDCH, Dedicated Physical Data Channel). The DPCCH section includes a pilot bit sequence 5 and TPC information (Transmitter Power Control) 6 and TFI information (Transmitter Format Identifier) 7. The DPDCH section includes user data bits 8. The structure shown in Figure 3 can be found, for example, in the document ETSI STC SMG2 UMTS-L1: Tdoc SMG2 UMTS-L1 221/98.

The pilot bit sequence 5 is used for estimating the channel impulse response during a training sequence, and corresponds to a known bit pattern. The receiver can determine or estimate the channel impulse response of the mobile radio channel by comparing the received signal with the known pilot bit sequence.

The TFI information 7 is used for format identification for the respective receiver. The TFI bits are protected, according to the present WCDMA Standard, via a specific coding method, and are distributed over an entire frame (time duration 10 ms) by interleaving. If the TFI information 7 in each timeslot includes, for example, three bits b4...b5 as shown in Figure 3, there are a total of $3 \times 16 = 48$ TFI bits per frame, which includes 16 timeslots, and these bits are coded via a bi-orthogonal coding method.

The TPC information 6 represents the command, produced by the receiver and transmitted to the transmitter, to adjust the transmission power. To do this, the received power in the receiver or the signal-to-noise ratio in the received signal is compared with a predetermined reference value, and the value for the power adjustment command is determined as a function of the discrepancy. As such, if the received power exceeds the reference value, a command is produced to reduce the transmission power, while a command to increase the transmission power is produced if the received power is less than the predetermined reference value.

Thus, depending on the comparison result, the receiver transmits a digital or binary adjustment command to the transmitter. In this case, a command to increase the transmission power (power up command) is coded with a 1, while a command to reduce the transmission power (power down command) is coded with a 0. In each case, the adjustment command is transmitted to the transmitter after appropriate modulation. According to the WCDMA Standard for UMTS mobile radio systems that is currently under discussion, the transmission is carried out via QPSK modulation (Quadrature Phase Shift Keying), by which the binary 1 or 0 are changed to respective values -1 and +1, followed by the power control signal being spread.

The power control information, thus, generally includes only one bit, which indicates whether the transmission power should be increased or reduced at the transmission end. In order to allow this bit to be transmitted with a sufficiently low error probability, the bit is transmitted repeatedly. The TPC information shown in Figure 3 in consequence, for example, includes three bits b1...b3, which are transmitted successively with identical information contents. However, the power control information also may include a different number of bits; for example, more bits.

Relatively powerful coding methods which are known per se and via which it would be possible to achieve a better error probability are not used since the TPC bits will need to be evaluated immediately in the receiver of the TPC information, in order to allow the transmission power to be readjusted appropriately without delay. According to the prior art, the TPC bits are not coded together with other bits or data and also can not be distributed over a relatively long time period, for example over an entire frame, which is referred to as interleaving.

However, there is a requirement for the TPC bits to be transmitted correctly with as high a reliability level as possible in order to avoid the transmitter incorrectly or not reliably receiving the corresponding power adjustment command.

The document ETSI SMG2 L1 Expert Group, Tdos SMG2 UMTS-L1 736/98, Espoo, Finland, December 14-18, 1998, "Soft TPC Interpretation for Improved Closed Loop Power Control" discusses the reliability of the power

adjustment command transmitted to the transmitter, and adjustment in as optimum a manner as possible of the value of the power adjustment command as a function of the reliability of its reception. In this case, the authors indicate that the value of the power adjustment command should be chosen depending on the function \tanh 5 $(\Lambda/2)$, where Λ represents the reliability of the power adjustment command in the form of a log-likelihood distribution.

The present invention is directed toward providing an improved method for controlling the transmission power in a radio system, in particular in a mobile radio system, as well as a corresponding radio system, by which the reliability of 10 transmission of the power control information can be improved.

SUMMARY OF THE INVENTION

According to the present invention, the power control information transmitted in one timeslot is coded together with further data which is intended to be transmitted in the same timeslot. Both the power control information and this 15 further data or information are preferably transmitted in binary form, so that the power control information (TPC bits) transmitted in one timeslot is not simply transmitted repeatedly, but is coded together with further bits, which are intended to be transmitted within the same timeslot. These further bits may be, for example, the bits in the TFI information (TFI bits) in a WCDMA mobile radio system. However, 20 in principle, other bits, for example data bits, also can be used for coding with the TPC bits, provided they are intended to be, or can be, transmitted in the same timeslot at the TPC bits.

The coding method used for coding the TPC bits can in principle, be chosen as required. However, the coding method is advantageously chosen such that the 25 coding process provides added redundancy, which can be utilized during reception of the coded power control information to check the transmitted value of the power control information.

The coding method may, for example, include the TPC bits being coded together with the further bits to be coded with them to form a common binary data 30 word, at least some of whose bit values depend not only on the value of the TPC bits but also on the value of the further bits, for example the TFI bits. The bits to be

coded with one another can, thus, in particular, be linked via a logic exclusive-OR operation.

An advantage of the present invention is that the added redundancy, which results from the dependency of the coded bits on both the value of the TPC bits and the value of the further bits to be coded with them, allows additional estimated values to be obtained for the power control information to be transmitted, which then can be used to check the received power control information, in order to increase the reliability of transmission of the power control information.

The present invention is preferably used in CDMA mobile radio systems, especially in WCDMA mobile radio systems, such as the UMTS mobile radio system. Furthermore, the present invention is preferably used in a mobile radio system in the downlink, that is to say for transmission of the power control information from the base station to the mobile station, since CDMA mobile radio systems have increased delay times in the uplink, owing to the code division multiplexing method used. In principle, the present invention can, however, be applied to any type of radio system in which it is intended to transmit power control information embedded in a (frame and) timeslot structure.

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Invention and the Figures.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 shows the frame and timeslot structure according to the present invention for a downlink connection in a WCDMA mobile radio system to which the present invention is preferably applied.

Figure 2 shows a schematic illustration of a mobile radio system in order to explain the information transmission for power control.

Figure 3 shows the known frame and timeslot structure for a downlink connection in a WCDMA mobile radio system.

DETAILED DESCRIPTION OF THE INVENTION

The frame and timeslot structure shown in Figure 1 indicates the principle on which the present invention is based, with the fundamental layout of this

structure corresponding to the structure shown in Figure 3, so that reference also should be made to the corresponding explanatory notes relating to Figure 3.

As has already been described initially, in the structure shown in Figure 3, the bits for power control information 6 (referred to as TPC bits in the following text) are transmitted separately from the further information, to be transmitted in the same timeslot, in a timeslot 4. In particular, the power control information normally includes only one bit value, which is transmitted a number of times successively, according to Figure 3, for example, three times in the form of the TPC bits b1...b3. The further control and data bits are separated from the TPC bits b1...b3.

However, according to the present invention, this separation is canceled, and the TPC bits b1...b3 are coded together with further bits which are transmitted in the same timeslot 4. These may be, for example, the bits in the format identification information 7 (referred to as TFI bits in the following text). However, other bits, such as bits in the data information 8, also can be used for coding the TPC bits.

In order to explain the principle on which the present invention is based, it is assumed by way of example in the following text that the power control information includes three TPC bits b1...b3, which are intended to be coded, in redundant form, together with three TFI bits b4...b6 of format identification information. The value of the power control information to be transmitted is denoted p, while the value of the format identification information to be transmitted in the same timeslot 4 is denoted t.

With the conventional structure shown in Figure 3, the bits b1...b3 would all be assigned the value p, while the bits b4...b6 would define the value t, separately from this.

According to one preferred exemplary embodiment of the present invention, it is now proposed that a coded data word which is common to the power control information and format identification information be generated from the bits b1...b6, at least some of whose bit values are influenced not only by the value p but

also by the value t . In particular, the bits $b1...b6$ in this coded data word can be allocated as follows, in the course of coding:

$$b1 = b2 = p$$

$$b3 = b4 = p \text{ XOR } t$$

5 $b5 = b6 = t$

The coded data word thus includes a total number of bits corresponding to the sum of the TPC bits and TFI bits, in which, however, some of the bits in this data word are occupied only with the TPC value p (see the bits $b1$ and $b2$), while a
10 further portion of this data word is occupied only by the TFI value t (see the bits $b5$ and $b6$). A third section of the data word is, finally, obtained via a logic operation, in particular via a logic exclusive-OR operation, between the TPC value p and the TFI value t (see the bits $b3$ and $b4$). Thus, in comparison to the conventional structure shown in Figure 3, the bits $b3...b6$ are used differently in the coding
15 method described above.

After the transmission of this code word with the coded bits $b1...b6$ to the transmitter for appropriate readjustment of the transmission power, the transmitter can use the information contained in the bits $b3...b6$ to calculate an estimated value p' for the TPC information. To do this, the transmitter uses $b5$ and $b6$ to determine
20 an estimated value for t , so that the estimated value p' can be calculated from the bits $b3$ and $b4$, on the basis of the estimated value of t , and utilizing the known XOR function.

This estimated value p' thus replaces the estimated value for the power control information obtained from the bit $b3$ when using the known structure shown
25 in Figure 3. This procedure has the advantage that p' is, in each case, based on two bits, with this combination making it possible to achieve a transmission capability that is improved by 3 dB.

The calculation of the XOR function admittedly results in a higher bit error rate. However, at least when the channel or transmission conditions are not very
30 bad, this is more than compensated for by the gain. This will be explained briefly below.

If f denotes the probability that a bit will be detected incorrectly, then the probability of incorrect detection is improved approximately to f^2 if this bit is

transmitted twice. On the other hand, the probability of incorrect detection resulting from the XOR calculation deteriorates approximately to $2f$ since, in this case, the XOR calculation produces an incorrect value just by one of the two XOR-linked values or bits having been detected incorrectly. The coding method described above thus gives better results provided the following relationship is satisfied:

$$2f^2 < f$$

or

$$f < 0.5$$

This relationship is satisfied for WCDM transmission methods, so that the present invention ensures improved transmission reliability, particularly when used in (W)CDMA mobile radio systems.

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

ABSTRACT OF THE DISCLOSURE

In a radio system, in particular a CDMA mobile radio system, a receiver evaluates a signal received from a transmitter and produces power control information for setting the transmission power as a function of this evaluation. In order to improve the transmission reliability of the power control information, it is coded, and is transmitted to the transmitter, together with further data from the said timeslot, for example with bits from the format identification information.

In the claims:

On page 11, cancel line 1 and substitute the following left-hand justified heading therefor:

CLAIMS

Please cancel claims 1-24, without prejudice, and substitute the following claims therefor:

25. A method for controlling transmission power in a radio system, the method comprising the steps of:

evaluating a signal received by a receiver via a transmission channel of the radio system from a transmitter;

producing power control information as a function of the evaluation;

5 sending the power control information, embedded in a time slot structure, to the transmitter;

setting the transmission power in the transmitter as a function of the power control information;

coding, in the receiver, the power control information in one time slot, with the addition of redundancy, together with further data to be transmitted in the same
10 one time slot to form a common data word, with at least one bit value in the data word depending on the power control information and on the further data; and

transmitting the power control information to the transmitter, together with the further data to be transmitted, in the one time slot.

15 26. A method for controlling transmission power in a radio system as claimed in claim 25, wherein the further data is data for format identification information.

20 27. A method for controlling transmission power in a radio system as claimed in claim 25, wherein the further data is user data.

28. A method for controlling transmission power in a radio system as claimed in claim 25, wherein the power control information is transmitted in binary form.

25

29. A method for controlling transmission power in a radio system as claimed in claim 28, wherein bits in the power control information are coded with bits of the further data to form a common binary data word.

30 30. A method for controlling transmission power in a radio system as claimed in claim 29, wherein the coded data word includes a plurality of bits

corresponding to a sum of the bits in the power control information and the bits in the further data.

31. A method for controlling transmission power in a radio system as
5 claimed in claim 29, wherein, during the coding process, at least one bit in the coded data word is assigned a value of the power control information to be transmitted in the corresponding one time slot.

32. A method for controlling transmission power in a radio system as
10 claimed in claim 29, wherein, during the coding process, at least one bit in the coded data word is assigned a value of the information to be transmitted in the corresponding one time slot from the further data.

33. A method for controlling transmission power in a radio system as
15 claimed in claim 29, wherein, during the coding process, at least one bit in the coded data word is assigned a value which corresponds to a logic operation between the power control information to be transmitted in the corresponding one time slot and the information to be transmitted in the same one time slot from the further data.

20

34. A method for controlling transmission power in a radio system as claimed in claim 33, wherein a logic exclusive-OR operation is used as the logic operation.

25 35. A method for controlling transmission power in a radio system as claimed in claim 33, wherein the power control information is recovered in the transmitter via appropriate decoding, with an estimated value being determined for the power control information during the decoding process based on a value obtained by the logic operation from the corresponding bit in the coded data word.

30

36. A method for controlling transmission power in a radio system as claimed in claim 25, wherein the receiver which produces the coded power control information is a base station in a mobile radio system, and the transmitter which receives the power control information and sets its transmission level appropriately
5 is a mobile station in the mobile radio system, such that the coded power control information is transmitted via a downlink connection between the receiver and the transmitter.

37. A radio system, comprising:
10 a transmitter; and
a receiver for receiving a signal, which is transmitted via a transmission channel of the mobile radio system, from the transmitter and for evaluating the received signal, so as to produce power control information which is dependent on the received signal and to send the power control information, embedded in a time
15 slot structure, to the transmitter;

wherein the transmitter sets the transmission power as a function of the power control information from the receiver, the receiver codes the power control information for one time slot, with the addition of redundancy, together with further data to be transmitted in the same one time slot to form a common data word, with
20 at least one bit value in the data word depending on the power control information and on the further data, and transmits the power control information to the transmitter, together with further data to be transmitted in the same one time slot.

38. A radio system as claimed in claim 37, wherein the receiver codes
25 the power control information together with data from format identification information for the same one time slot.

39. A radio system as claimed in claim 38, wherein the receiver codes
the power control information together with user data for the same one time slot.
30

40. A radio system as claimed in claim 37, wherein the receiver sends the power control information to the transmitter in binary form.

41. A radio system as claimed in claim 40, wherein the receiver codes
5 the bits in the power control information together with bits in the further data to form a common binary data word.

42. A radio system as claimed in claim 41, wherein the receiver, during
the coding process, assigns at least one bit in the coded common data word a value
10 of the power control information to be transmitted in the corresponding one time slot.

43. A radio system as claimed in claim 41, wherein the receiver, during
the coding process, assigns at least one bit in the coded common data word a value
15 of the information to be transmitted in the corresponding one time slot from the further data.

44. A radio system as claimed in claim 41, wherein the receiver, during
the coding process, assigns at least one bit in the coded common data word a value
20 which corresponds to a logic operation between the power control information to be transmitted in the corresponding one time slot and the information to be transmitted in the same one time slot from the further data.

45. A radio system as claimed in claim 44, wherein the logic operation
25 carried out by the receiver during the coding process is a logic exclusive-OR operation.

46. A radio system as claimed in claim 44, wherein the transmitter, after
receiving the coded common data word, recovers the power control information via
30 appropriate decoding and determines an estimated value for the power control

information based on the value obtained by the logic operation from the corresponding bit in the coded common data word.

47. A radio system as claimed in claim 37, wherein the radio system is a
5 CDMA mobile radio system.

48. A radio system as claimed in claim 47, wherein the receiver which
produces the coded binary power control information is a base station in the mobile
radio system, and the transmitter which receives the power control information and
10 sets its transmission power appropriately is a mobile station in the mobile radio
system.


REMARKS

The present amendment makes editorial changes and corrects typographical
errors in the specification, which includes the Abstract, in order to conform the
15 specification to the requirements of United States Patent Practice. No new matter is
added thereby. Attached hereto is a marked-up version of the changes made to the
specification by the present amendment. The attached page is captioned "**Version
With Markings To Show Changes Made**".

In addition, the present amendment cancels original claims 1-24 in favor of
20 new claims 25-48. Claims 25-48 have been presented solely because the revisions
by crossing out underlining which would have been necessary in claims 1-24 in
order to present those claims in accordance with preferred United States Patent
Practice would have been too extensive, and thus would have been too burdensome.
The present amendment is intended for clarification purposes only and not for
25 substantial reasons related to patentability pursuant to 35 U.S.C. §§103, 102, 103 or
112. Indeed, the cancellation of claims 1-24 does not constitute an intent on the
part of the Applicants to surrender any of the subject matter of claims 1-24.

Early consideration on the merits is respectfully requested.

Respectfully submitted,



(Reg. No. 39,056)

William E. Vaughn
Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, Illinois 60690-1135
(312) 807-4292
Attorneys for Applicants

VERSIONS WITH MARKINGS TO SHOW CHANGES MADE

In The Specification:

The Specification of the present application, including the Abstract, has been amended as follows:

SPECIFICATION

TITLE OF THE INVENTION

Description

Method for controlling the transmission power in a radio system, and a corresponding radio system

METHOD FOR CONTROLLING TRANSMISSION POWER IN A RADIO

SYSTEM, AND A CORRESPONDING RADIO SYSTEM

BACKGROUND OF THE INVENTION

The present invention relates to a method for controlling the transmission power in a radio system, and to a corresponding radio system, in particular a corresponding mobile radio system.

Transmission power control in mobile radio systems is an important performance feature in order to be able to suppress possible interference between the individual connections and, hence, to allow the capacity and quality of the connections to be improved, as well as to be able to reduce the mean transmission power, to achieve the best possible matching to the requirements and to allow losses via the transmission channels to be at least partially compensated for.

To this end, the signal transmitted by a transmitter is evaluated at the receiving end in the mobile radio system in order to allow information to be produced as a function of this for power control, and to allow this information to be transmitted to the transmitter, which then adjusts the transmission power in accordance with the power control information.

In order to explain the principle of power control in more detail, Figure 2 shows the communication between a base station 1 and a mobile station 2 in a mobile radio system. A connection from the base station 1 to the mobile part 2 is referred to as the downlink or forward link connection, while a connection from the mobile part 2 to the base station 1 is referred to as the uplink connection, or reverse

link connection. For power control in the downlink, the respective received signal is evaluated in the mobile station 2, and power control information is produced as a function of this and is sent back to the base station 1, so that the base station 1 can adjust the transmission power appropriately. In order to control the uplink, the received signal is evaluated in the base station 1, where the power control information is produced and the mobile station 2 is instructed to carry out power matching.

The power control information is, in this case, transmitted within a predetermined frame structure, depending on the respective mobile radio system.

Figure 3 shows an example of the frame and timeslot structure for a downlink connection in a mobile radio system operated using a code division multiple access method (CDMA). The frame and timeslot structure shown in Figure 3 corresponds, in particular, to a UMTS mobile radio channel (Universal Mobile Telecommunications System), which is also referred to as DPCH (Dedicated Physical Channel) in accordance with the current state of UMTS standardization. UMTS is the designation for third-generation mobile radio systems, with the aim of a worldwide, universal mobile radio standard. According to the UMTS mobile radio standard, the WCDMA method (Wideband Code Division Multiple Access) is intended for use as the multiple access method.

The frame structure shown in Figure 3 and with a duration of 720 ms ~~comprises~~ includes, in particular, 72 frames 3 of identical construction and having a frame duration of 10 ms, with each frame, in turn, each having 16 timeslots 4, with a timeslot duration of 0.625 ms. Each timeslot 4 ~~comprises~~ includes information split between a logical control channel (DPCCCH, Dedicated Physical Control Channel) and a logical data channel (DPDCH, Dedicated Physical Data Channel). The DPCCCH section ~~comprises~~ includes a pilot bit sequence 5 and TPC information (Transmitter Power Control) 6 and TFI information (Transmitter Format Identifier) 7. The DPDCH section ~~comprises~~ includes user data bits 8. The structure shown in Figure 3 can be found, for example, in the document ETSI STC SMG2 UMTS-L1: Tdoc SMG2 UMTS-L1 221/98.

The pilot bit sequence 5 is used for estimating the channel impulse response during a training sequence, and corresponds to a known bit pattern. The receiver can determine or estimate the channel impulse response of the mobile radio channel by comparing the received signal with the known pilot bit sequence.

5 The TFI information 7 is used for format identification for the respective receiver. The TFI bits are protected, according to the present WCDMA Standard, ~~by means of~~ via a specific coding method, and are distributed over an entire frame (time duration 10 ms) by interleaving. If the TFI information 7 in each timeslot ~~comprises~~ includes, for example, three bits b4...b5 as shown in Figure 3, there are
10 total of $3 \times 16 = 48$ TFI bits per frame, which ~~comprises~~ includes 16 timeslots, and these bits are coded ~~by means of~~ via a bi-orthogonal coding method.

The TPC information 6 represents the command, produced by the receiver and transmitted to the transmitter, to adjust the transmission power. To do this, the received power in the receiver or the signal-to-noise ratio in the received signal is
15 compared with a predetermined reference value, and the value for the power adjustment command is determined as a function of the discrepancy. ~~This means that~~ As such, if the received power exceeds the reference value, a command is produced to reduce the transmission power, while a command to increase the transmission power is produced if the received power is less than the predetermined
20 reference value. Thus, depending on the comparison result, the receiver transmits a digital or binary adjustment command to the transmitter. In this case, a command to increase the transmission power (power up command) is coded with a 1, while a command to reduce the transmission power (power down command) is coded with a 0. In each case, the adjustment command is transmitted to the transmitter after
25 appropriate modulation. According to the WCDMA Standard for UMTS mobile radio systems that is currently under discussion, the transmission is carried out by ~~means of~~ via QPSK modulation (Quadrature Phase Shift Keying), by which ~~means~~ the binary 1 or 0 are changed to respective values -1 and +1, followed by the power control signal being spread.

30 The power control information, thus, generally ~~comprises~~ includes only one bit, which indicates whether the transmission power should be increased or reduced

at the transmission end. In order to allow this bit to be transmitted with a sufficiently low error probability, the bit is transmitted repeatedly. The TPC information shown in Figure 3 in consequence, for example, ~~comprises~~ includes three bits b1...b3, which are transmitted successively with identical information contents. However, the power control information ~~may also comprise~~ may include a different number of bits; for example, more bits.

Relatively powerful coding methods which are known per se and ~~by means of via~~ which it would be possible to achieve a better error probability are not used since the TPC bits will need to be evaluated immediately in the receiver of the TPC information; in order to allow the transmission power to be readjusted appropriately without delay. According to the prior art, the TPC bits are ~~thus~~ not coded together with other bits or data and also ~~also~~ not be distributed over a relatively long time period, for example over an entire frame, which is referred to as interleaving.

However, there is a requirement for the TPC bits to be transmitted correctly with as high a reliability level as possible in order to avoid the transmitter incorrectly or not reliably receiving the corresponding power adjustment command.

The document ETSI SMG2 L1 Expert Group, Tdos SMG2 UMTS-L1 736/98, Espoo, Finland, December 14-18, 1998, "Soft TPC Interpretation for Improved Closed Loop Power Control" discusses the reliability of the power adjustment command transmitted to the transmitter, and adjustment in as optimum a manner as possible of the value of the power adjustment command as a function of the reliability of its reception. In this case, the authors indicate that the value of the power adjustment command should be chosen depending on the function $\tanh(\Lambda/2)$, where Λ represents the reliability of the power adjustment command in the form of a log-likelihood distribution.

The present invention is ~~based on the object of~~ directed toward providing an improved method for controlling the transmission power in a radio system, in particular in a mobile radio system, as well as a corresponding radio system, by which ~~means~~ the reliability of transmission of the power control information can be improved.

According to the invention, this object is achieved by a method having the features of claim 1, and by a corresponding mobile radio system having the features of claim 13. The dependent claims each describe preferred and advantageous embodiments of the present invention.

5 SUMMARY OF THE INVENTION

According to the present invention, the power control information transmitted in one timeslot is coded together with further data which is intended to be transmitted in the same timeslot. Both the power control information and this further data or information are preferably transmitted in binary form, so that the power control information (TPC bits) transmitted in one timeslot is not simply transmitted repeatedly, but is coded together with further bits, which are intended to be transmitted within the same timeslot. These further bits may be, for example, the bits in the TFI information (TFI bits) in a WCDMA mobile radio system. However, in principle, other bits, for example data bits, can also can be used for coding with the TPC bits, provided they are intended to be, or can be, transmitted in the same timeslot at the TPC bits.

The coding method used for coding the TPC bits can in principle, be chosen as required. However, the coding method is advantageously chosen such that the coding process provides added redundancy, which can be utilized during reception of the coded power control information to check the transmitted value of the power control information.

The coding method may, for example, ~~comprise~~ include the TPC bits being coded together with the further bits to be coded with them to form a common binary data word, at least some of whose bit values depend not only on the value of the TPC bits but also on the value of the further bits, for example the TFI bits. The bits to be coded with one another can, thus, in particular, be linked ~~by means of~~ via a logic exclusive-OR operation.

The An advantage of the present invention is that the added redundancy, which results from the dependency of the coded bits on both the value of the TPC bits and the value of the further bits to be coded with them, allows additional estimated values to be obtained for the power control information to be transmitted.

which then can ~~then~~ be used to check the received power control information, in order to increase the reliability of transmission of the power control information.

The present invention is preferably used in CDMA mobile radio systems, especially in WCDMA mobile radio systems, such as the UMTS mobile radio system. Furthermore, the present invention is preferably used in a mobile radio system in the downlink, that is to say for transmission of the power control information from the base station to the mobile station, since CDMA mobile radio systems have increased delay times in the uplink, owing to the code division multiplexing method used. In principle, the present invention can, however, be applied to any type of radio system in which it is intended to transmit power control information embedded in a (frame and) timeslot structure.

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Invention and the Figures.

The invention will be explained in more detail in the following text with reference to the attached drawing on the basis of use in the downlink of a WCDMA mobile radio system, in particular a UMTS mobile radio system. In this case:

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 shows the frame and timeslot structure according to the present invention for a downlink connection in a WCDMA mobile radio system to which the present invention is preferably applied.

Figure 2 shows a schematic illustration of a mobile radio system in order to explain the information transmission for power control, and

Figure 3 shows the known frame and timeslot structure for a downlink connection in a WCDMA mobile radio system.

DETAILED DESCRIPTION OF THE INVENTION

The frame and timeslot structure shown in Figure 1 indicates the principle on which the present invention is based, with the fundamental layout of this structure corresponding to the structure shown in Figure 3, so that reference also should also be made to the corresponding explanatory notes relating to Figure 3.

As has already been described initially, in the structure shown in Figure 3, the bits for power control information 6 (referred to as TPC bits in the following text) are transmitted separately from the further information, to be transmitted in the same timeslot, in a timeslot 4. In particular, the power control information
5 normally ~~comprises~~ includes only one bit value, which is transmitted a number of times successively, according to Figure 3, for example, three times in the form of the TPC bits b1...b3. The further control and data bits are separated from the TPC bits b1...b3.

However, according to the present invention, this separation is canceled,
10 and the TPC bits b1...b3 are coded together with further bits which are transmitted in the same timeslot 4. These may be, for example, the bits in the format identification information 7 (referred to as TFI bits in the following text). However, other bits, such as bits in the data information 8, ~~can~~ also can possibly be used for coding the TPC bits.

15 In order to explain the principle on which the present invention is based, it is assumed by way of example in the following text that the power control information ~~comprises~~ includes three TPC bits b1...b3, which are intended to be coded, in redundant form, together with three TFI bits b4...b6 of format identification information. The value of the power control information to be
20 transmitted is denoted p, while the value of the format identification information to be transmitted in the same timeslot 4 is denoted t.

With the conventional structure shown in Figure 3, the bits b1...b3 would all be assigned the value p, while the bits b4...b6 would define the value t, separately from this.

25 According to one preferred exemplary embodiment of the present invention, it is now proposed that a coded data word which is common to the power control information and format identification information be generated from the bits b1...b6, at least some of whose bit values are influenced not only by the value p but also by the value t. In particular, the bits b1...b6 in this coded data word can be
30 allocated as follows, in the course of coding:

$$b1 = b2 = p$$

$$b3 = b4 = p \text{ XOR } t$$

$$b5 = b6 = t$$

5 The coded data word thus ~~comprises~~ includes a total number of bits corresponding to the sum of the TPC bits and TFI bits, in which, however, some of the bits in this data word are occupied only with the TPC value p (see the bits b1 and b2), while a further portion of this data word is occupied only by the TFI value t (see the bits b5 and b6). A third section of the data word is, finally, obtained by
10 ~~means of via~~ a logic operation, in particular ~~by means of via~~ a logic exclusive-OR operation, between the TPC value p and the TFI value t (see the bits b3 and b4). Thus, in comparison to the conventional structure shown in Figure 3, the bits b3...b6 are used differently in the coding method described above.

 After the transmission of this code word with the coded bits b1...b6 to the
15 transmitter for appropriate readjustment of the transmission power, the transmitter can use the information contained in the bits b3...b6 to calculate an estimated value p' for the TPC information. To do this, the transmitter uses b5 and b6 to determine an estimated value for t, so that the estimated value p' can be calculated from the bits b3 and b4, on the basis of the estimated value of t, and utilizing the known
20 XOR function.

 This estimated value p' thus replaces the estimated value for the power control information obtained from the bit b3 when using the known structure shown in Figure 3. This procedure has the advantage that p' is, in each case, based on two bits, with this combination making it possible to achieve a transmission capability
25 that is improved by 3 dB.

 The calculation of the XOR function admittedly results in a higher bit error rate. However, at least when the channel or transmission conditions are not very bad, this is more than compensated for by the gain. This will be explained briefly below.

30 If f denotes the probability that a bit will be detected incorrectly, then the probability of incorrect detection is improved approximately to f^2 if this bit is transmitted twice. On the other hand, the probability of incorrect detection resulting

from the XOR calculation deteriorates approximately to $2f$ since, in this case, the XOR calculation produces an incorrect value just by one of the two XOR-linked values or bits having been detected incorrectly. The coding method described above thus gives better results provided the following relationship is satisfied:

5 $2f^2 < f$

or

10 $f < 0.5$

This relationship is satisfied for WCDM transmission methods, so that the present invention ensures improved transmission reliability, particularly when used in (W)CDMA mobile radio systems.

15 Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

~~Abstract~~

ABSTRACT OF THE DISCLOSURE

~~Method for controlling the transmission power in a radio system, and a
corresponding radio system~~

5 In a radio system, in particular a CDMA mobile radio system, a receiver (1;
2) evaluates a signal received from a transmitter (2; 1) and produces power control
information (6) for setting the transmission power as a function of this evaluation.
In order to improve the transmission reliability of the power control information
(6), it is coded, and is transmitted to the transmitter (2; 1), together with further data
10 from the said timeslot, for example with bits from the format identification
information (7).

(Figure 1)

GR 99 P 1715

2/pvtb

Description

Method for controlling the transmission power in a radio system, and a corresponding radio system

5

The present invention relates to a method for controlling the transmission power in a radio system, and to a corresponding radio system, in particular a corresponding mobile radio system.

10

Transmission power control in mobile radio systems is an important performance feature in order to be able to suppress possible interference between the individual connections and hence to allow the capacity and quality of the connections to be improved, as well as to be able to reduce the mean transmission power, to achieve the best possible matching to the requirements and to allow losses via the transmission channels to be at least partially compensated for.

20

To this end, the signal transmitted by a transmitter is evaluated at the receiving end in the mobile radio system in order to allow information to be produced as a function of this for power control, and to allow this information to be transmitted to the transmitter, which then adjusts the transmission power in accordance with the power control information.

25

In order to explain the principle of power control in more detail, Figure 2 shows the communication between a base station 1 and a mobile station 2 in a mobile radio system. A connection from the base station 1 to the mobile part 2 is referred to as the downlink or forward link connection, while a connection from the mobile part 2 to the base station 1 is referred to as the uplink connection, or reverse link connection. For power control in the downlink, the respective received signal is evaluated in the mobile station 2, and power

30

35

control information is produced as a function of this and is sent back to the base station 1, so that the base station 1 can adjust the transmission power appropriately. In order to control the

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219

uplink, the received signal is evaluated in the base station 1, where the power control information is produced and the mobile station 2 is instructed to carry out power matching.

5

The power control information is in this case transmitted within a predetermined frame structure, depending on the respective mobile radio system.

10 Figure 3 shows an example of the frame and timeslot structure for a downlink connection in a mobile radio system operated using a code division multiple access method (CDMA). The frame and timeslot structure shown in Figure 3 corresponds in particular to a UMTS mobile
15 radio channel (Universal Mobile Telecommunications System), which is also referred to as DPCH (Dedicated Physical Channel) in accordance with the current state of UMTS standardization. UMTS is the designation for third-generation mobile radio systems, with the aim of
20 a worldwide, universal mobile radio standard. According to the UMTS mobile radio standard, the WCDMA method (Wideband Code Division Multiple Access) is intended for use as the multiple access method.

25 The frame structure shown in Figure 3 and with a duration of 720 ms comprises, in particular, 72 frames 3 of identical construction and having a frame duration of 10 ms, with each frame in turn each having 16
30 timeslots 4, with a timeslot duration of 0.625 ms. Each timeslot 4 comprises information split between a logical control channel (DPCCH, Dedicated Physical Control Channel) and a logical data channel (DPDCH, Dedicated Physical Data Channel). The DPCCH section comprises a pilot bit sequence 5 and TPC information
35 (Transmitter Power Control) 6 and TFI information (Transmitter Format Identifier) 7. The DPDCH section comprises user data bits 8. The structure shown in

GR 99 P 1715

- 2a -

Figure 3 can be found, for example, in the document
ETSI STC SMG2 UMTS-L1: Tdoc SMG2 UMTS-L1 221/98.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219

The pilot bit sequence 5 is used for estimating the channel impulse response during a training sequence, and corresponds to a known bit pattern. The receiver can determine or estimate the channel impulse response of the mobile radio channel by comparing the received signal with the known pilot bit sequence.

The TFI information 7 is used for format identification for the respective receiver. The TFI bits are protected, according to the present WCDMA Standard, by means of a specific coding method, and are distributed over an entire frame (time duration 10 ms) by interleaving. If the TFI information 7 in each timeslot comprises, for example, three bits $b_4 \dots b_5$ as shown in Figure 3, there are a total of $3 \times 16 = 48$ TFI bits per frame, which comprises 16 timeslots, and these bits are coded by means of a bi-orthogonal coding method.

The TPC information 6 represents the command, produced by the receiver and transmitted to the transmitter, to adjust the transmission power. To do this, the received power in the receiver or the signal-to-noise ratio in the received signal is compared with a predetermined reference value, and the value for the power adjustment command is determined as a function of the discrepancy. This means that, if the received power exceeds the reference value, a command is produced to reduce the transmission power, while a command to increase the transmission power is produced if the received power is less than the predetermined reference value. Thus, depending on the comparison result, the receiver transmits a digital or binary adjustment command to the transmitter. In this case, a command to increase the transmission power (power up command) is coded with a 1, while a command to reduce the transmission power (power down command) is coded with a 0. In each case, the adjustment command is transmitted to the transmitter after appropriate modulation. According to

GR 99 P 1715

- 3a -

the WCDMA Standard for UMTS mobile radio systems that
is currently under discussion,

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230

the transmission is carried out by means of QPSK modulation (Quadrature Phase Shift Keying), by which means the binary 1 or 0 are changed to respective values -1 and +1, followed by the power control signal
5 being spread.

The power control information thus generally comprises only one bit, which indicates whether the transmission power should be increased or reduced at the
10 transmission end. In order to allow this bit to be transmitted with a sufficiently low error probability, the bit is transmitted repeatedly. The TPC information shown in Figure 3 in consequence, for example, comprises three bits b1...b3, which are transmitted
15 successively with identical information contents. However, the power control information may also comprise a different number of bits, for example more bits.

20 Relatively powerful coding methods which are known per se and by means of which it would be possible to achieve a better error probability are not used since the TPC bits will need to be evaluated immediately in the receiver of the TPC information, in order to allow
25 the transmission power to be readjusted appropriately without delay. According to the prior art, the TPC bits are thus not coded together with other bits or data and can also not be distributed over a relatively long time period, for example over an entire frame, which is
30 referred to as interleaving.

However, there is a requirement for the TPC bits to be transmitted correctly with as high a reliability level as possible in order to avoid the transmitter
35 incorrectly or not reliably receiving the corresponding power adjustment command.

TPC Interpretation for Improved Closed Loop Power Control" discusses the reliability of the power adjustment command transmitted to the transmitter, and adjustment in as optimum a manner as possible of the

value of the power adjustment command as a function of the reliability of its reception. In this case, the authors indicate that the value of the power adjustment command should be chosen depending on the function $\tanh(\Lambda/2)$, where Λ represents the reliability of the power adjustment command in the form of a log-likelihood distribution.

The present invention is based on the object of providing an improved method for controlling the transmission power in a radio system, in particular in a mobile radio system, as well as a corresponding radio system, by which means the reliability of transmission of the power control information can be improved.

According to the invention, this object is achieved by a method having the features of claim 1, and by a corresponding mobile radio system having the features of claim 13. The dependent claims each describe preferred and advantageous embodiments of the present invention.

According to the invention, the power control information transmitted in one timeslot is coded together with further data which is intended to be transmitted in the same timeslot. Both the power control information and this further data or information are preferably transmitted in binary form, so that the power control information (TPC bits) transmitted in one timeslot is not simply transmitted repeatedly, but is coded together with further bits, which are intended to be transmitted within the same timeslot. These further bits may be, for example, the bits in the TFI information (TFI bits) in a WCDMA mobile radio system. However, in principle, other bits, for example data bits, can also be used for coding with the TPC bits, provided they are intended to be, or can be, transmitted in the same timeslot at the TPC bits.

The coding method used for coding the TPC bits can in principle be chosen as required. However, the coding method is advantageously chosen such that the coding process provides added redundancy, which can be
5 utilized during reception of the coded power control information to check the transmitted value of the power control information.

The coding method may, for example, comprise the TPC
10 bits being coded together with the further bits to be coded with them to form a common binary data word, at least some of whose bit values depend not only on the value of the TPC bits but also on the value of the further bits, for example the TFI bits. The bits to be
15 coded with one another can thus, in particular, be linked by means of a logic exclusive-OR operation.

The advantage of the invention is that the added redundancy, which results from the dependency of the
20 coded bits on both the value of the TPC bits and the value of the further bits to be coded with them, allows additional estimated values to be obtained for the power control information to be transmitted, which can then be used to check the received power control
25 information, in order to increase the reliability of transmission of the power control information.

The present invention is preferably used in CDMA mobile radio systems, especially in WCDMA mobile radio
30 systems, such as the UMTS mobile radio system. Furthermore, the invention is preferably used in a mobile radio system in the downlink, that is to say for transmission of the power control information from the base station to the mobile station, since CDMA mobile
35 radio systems have increased delay times in the uplink, owing to the code division multiplexing method used. In principle, the present invention

can, however, be applied to any type of radio system in which it is intended to transmit power control information embedded in a (frame and) timeslot structure.

5

The invention will be explained in more detail in the following text with reference to the attached drawing on the basis of use in the downlink of a WCDMA mobile radio system, in particular a UMTS mobile radio system.

10 In this case:

Figure 1 shows the frame and timeslot structure according to the present invention for a downlink connection in a WCDMA mobile radio system to which the
15 present invention is preferably applied,

Figure 2 shows a schematic illustration of a mobile radio system in order to explain the information transmission for power control, and

20

Figure 3 shows the known frame and timeslot structure for a downlink connection in a WCDMA mobile radio system.

25 The frame and timeslot structure shown in Figure 1 indicates the principle on which the present invention is based, with the fundamental layout of this structure corresponding to the structure shown in Figure 3, so that reference should also be made to the corresponding
30 explanatory notes relating to Figure 3.

As has already been described initially, in the structure shown in Figure 3, the bits for power control information 6 (referred to as TPC bits in the following
35 text) are transmitted separately from the further information, to be transmitted in the same timeslot, in a timeslot 4. In particular, the power control information normally comprises only one bit value,

GR 99 P 1715

- 7a -

which is transmitted a number of times successively,
according to Figure 3, for example, three times in the
form of the TPC bits

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228

b1...b3. The further control and data bits are separated from the TPC bits b1...b3.

However, according to the invention, this separation is canceled, and the TPC bits b1...b3 are coded together with further bits which are transmitted in the same timeslot 4. These may be, for example, the bits in the format identification information 7 (referred to as TFI bits in the following text). However, other bits, such as bits in the data information 8, can also possibly be used for coding the TPC bits.

In order to explain the principle on which the invention is based, it is assumed by way of example in the following text that the power control information comprises three TPC bits b1...b3, which are intended to be coded, in redundant form, together with three TFI bits b4...b6 of format identification information. The value of the power control information to be transmitted is denoted p , while the value of the format identification information to be transmitted in the same timeslot 4 is denoted t .

With the conventional structure shown in Figure 3, the bits b1...b3 would all be assigned the value p , while the bits b4...b6 would define the value t , separately from this.

According to one preferred exemplary embodiment of the invention, it is now proposed that a coded data word which is common to the power control information and format identification information be generated from the bits b1...b6, at least some of whose bit values are influenced not only by the value p but also by the value t . In particular, the bits b1...b6 in this coded data word can be allocated as follows, in the course of coding:

$$b1 = b2 = p$$

GR 99 P 1715

- 8a -

b3 = b4 = p XOR t

b5 = b6 = t

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
222

The coded data word thus comprises a total number of bits corresponding to the sum of the TPC bits and TFI bits, in which, however, some of the bits in this data word are occupied only with the TPC value p (see the 5 bits $b1$ and $b2$), while a further portion of this data word is occupied only by the TFI value t (see the bits $b5$ and $b6$). A third section of the data word is, finally, obtained by means of a logic operation, in particular by means of a logic exclusive-OR operation, 10 between the TPC value p and the TFI value t (see the bits $b3$ and $b4$). Thus, in comparison to the conventional structure shown in Figure 3, the bits $b3...b6$ are used differently in the coding method described above.

15 After the transmission of this code word with the coded bits $b1...b6$ to the transmitter for appropriate readjustment of the transmission power, the transmitter can use the information contained in the bits $b3...b6$ 20 to calculate an estimated value p' for the TPC information. To do this, the transmitter uses $b5$ and $b6$ to determine an estimated value for t , so that the estimated value p' can be calculated from the bits $b3$ and $b4$, on the basis of the estimated value of t , and 25 utilizing the known XOR function.

This estimated value p' thus replaces the estimated value for the power control information obtained from the bit $b3$ when using the known structure shown in 30 Figure 3. This procedure has the advantage that p' is in each case based on two bits, with this combination making it possible to achieve a transmission capability that is improved by 3 dB.

35 The calculation of the XOR function admittedly results in a higher bit error rate. However, at least when the channel or transmission conditions are not very bad, this is more than compensated for by the gain. This will be explained briefly below.

If f denotes the probability that a bit will be detected incorrectly, then the probability of incorrect detection is improved approximately to f^2 if this bit is transmitted twice. On the other hand, the probability of incorrect detection resulting from the XOR calculation deteriorates approximately to $2f$ since, in this case, the XOR calculation produces an incorrect value just by one of the two XOR-linked values or bits having been detected incorrectly. The coding method described above thus gives better results provided the following relationship is satisfied:

$$2f^2 < f$$

15 or

$$f < 0.5$$

This relationship is satisfied for WCDM transmission methods, so that the invention ensures improved transmission reliability, particularly when used in (W)CDMA mobile radio systems.

May 22, 2001
1999P01715WO

10/009858

JC13 Rec'd PCT/PTO 22 OCT 2001

DE 00000102

- 1 -

Patent Claims

1. A method for controlling the transmission power in
5 a radio system,
in which a signal which is received by a receiver (1;
2) via a transmission channel of the radio system from
a transmitter (2; 1) is evaluated, and power control
information (6) is produced as a function of this and
10 is sent, embedded in a timeslot structure (4), to the
transmitter (2; 1),
in which the transmission power is set in the
transmitter (2; 1) as a function of the power control
information (6),
15 and
in which, in the receiver (1; 2), the power control
information (6) in a one timeslot (4) is coded, and is
transmitted to the transmitter (2; 1), together with
further data to be transmitted in the same timeslot
20 (4),
characterized
in that the coding is carried out in such a manner that
the power control information (6) in a timeslot (4) is
coded, with the addition of redundancy, together with
25 further data to be transmitted in the same timeslot (4)
to form a common data word, with at least one bit value
in the data word depending on the power control
information and on the further data.
- 30 2. The method as claimed in claim 1,
characterized
in that the further data together with which the power
control information (6) is coded is data for format
identification information (7).
- 35 3. The method as claimed in claim 1,
characterized

May 22, 2001
1999P01715WO

DE 00000102

- 2 -

in that the further data together with which the power

AMENDED SHEET

May 22, 2001
1999P01715WO

DE 00000102

- 1a -

control information (6) is coded is user data (8).

4. The method as claimed in one of the preceding claims,

characterized
in that the power control information is transmitted in
binary form.

- 5 5. The method as claimed in claim 4,
characterized
in that the bits in the power control information (6)
are coded with the bits of the further data to form a
common binary data word (b1...b6).

- 10 6. The method as claimed in claim 5,
characterized
in that the coded data word comprises a number of bits
(b1...b6) corresponding to the sum of the bits in the
15 power control information (6) and the bits in the
further data.

7. The method as claimed in claim 5 or 6,
characterized
20 in that, during the coding process, at least one bit
(b1, b2) in the coded data word is assigned the value
of the power control information (6) to be transmitted
in the corresponding timeslot (4).

- 25 8. The method as claimed in one of claims 5-7,
characterized
in that, during the coding process, at least one bit
(b5, b6) in the coded data word is assigned the value
of the information (7) to be transmitted in the
30 corresponding timeslot (4) from the further data.

9. The method as claimed in one of claims 5-8,
characterized
in that, during the coding process, at least one bit
35 (b4) in the coded data word is assigned the value which
corresponds to a logic operation between the power
control information (6) to be transmitted in the

May 22, 2001
1999P01715WO

DE 00000102

- 2a -

corresponding timeslot (4) and the information (7) to
be transmitted in the same timeslot (4) from the
further data.

10. The method as claimed in claim 9,
characterized
in that a logic exclusive-OR operation is used as the
logic operation.

5

11. The method as claimed in claim 9 or 10,
characterized
in that the power control information (6) is recovered
in the transmitter (2; 1) by means of appropriate
10 decoding, with an estimated value being determined for
the power control information during the decoding
process on the basis of the value obtained by the logic
operation from the corresponding bit in the coded data
word.

15

12. The method as claimed in one of the preceding
claims,
characterized

in that the receiver (1) which produces the coded power
control information (6) is a base station in a mobile
20 radio system, and the transmitter (2) which receives
the power control information and sets its transmission
level appropriately is a mobile station in the mobile
radio system, so that the coded power control
25 information (6) is transmitted via a downlink
connection between the receiver (1) and the transmitter
(2).

13. A radio system
30 having a transmitter (2; 1), and
having a receiver (1; 2) for receiving a signal, which
is transmitted via a transmission channel of the mobile
radio system, from the transmitter (2; 1) and for
evaluating the received signal, in order to produce
35 power control information (6) which is dependent on it
and to send this information, embedded in a timeslot
structure (4), to the transmitter (2; 1),

May 22, 2001
1999P01715WO

DE 00000102

- 3a -

in which the transmitter (2; 1) is configured such that it sets the transmission power as a function of the power control information from the receiver (1; 2),

- 4 -

in which the receiver (1; 2) is configured in such a manner that it codes the power control information (6) for a timeslot (4), and transmits it to the transmitter (2; 1), together with further data to be transmitted in the same timeslot (4),
5 characterized

in that the receiver (1; 2) is configured such that it codes the power control information (6) in a timeslot (4), with the addition of redundancy, together with
10 further data to be transmitted in the same timeslot (4) to form a common data word, with at least one bit value in the data word depending on the power control information and on the further data.

14. The radio system as claimed in claim 13,
15 characterized

in that the receiver (1; 2) is configured in such a manner that it codes the power control information (6) together with data from format identification
20 information (7) for the same timeslot (4).

15. The radio system as claimed in claim 13,
characterized

in that the receiver (1; 2) is configured such that it
25 codes the power control information (6) together with user data (7) for the same timeslot (4).

16. The radio system as claimed in one of claims 13-15,

30 characterized

in that the receiver (1; 2) is configured such that it sends the power control information (6) to the transmitter (2; 1) in binary form.

17. The radio system as claimed in claim 16,
35 characterized

May 22, 2001
1999P01715WO

DE 00000102

- 4a -

in that the receiver (1; 2) is configured such that it
codes the bits in the power control information (6)

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
222

- 5 -

together with the bits in the further data to form a common binary data word (b1...b6).

18. The radio system as claimed in claim 17,
5 characterized
in that the receiver (1; 2) is configured such that,
during the coding process, it assigns at least one bit
(b1, b2) in the coded common data word the value of the
power control information (6) to be transmitted in the
10 corresponding timeslot (4).

19. The radio system as claimed in claim 17 or 18,
characterized
15 in that the receiver (1; 2) is configured such that,
during the coding process, it assigns at least one bit
(b5, b6) in the coded common data word the value of the
information (7)
to be transmitted in the corresponding timeslot (4)
from the further data.

20
20. The radio system as claimed in one of claims 17-
19,
characterized
in that the receiver (1; 2) is configured such that,
25 during the coding process, it assigns at least one bit
(b4) in the coded common data word a value which
corresponds to a logic operation between the power
control information (6) to be transmitted in the
corresponding timeslot (4) and the information (7) to
30 be transmitted in the same timeslot (4) from the
further data.

21. The radio system as claimed in claim 20,
characterized
35 in that the logic operation carried out by the receiver
(1; 2) during the coding process is a logic exclusive-
OR operation.

May 22, 2001
1999P01715WO

DE 00000102

- 5a -

22. The radio system as claimed in claim 20 or 21,
characterized

- 6 -

in that the transmitter (2; 1) is configured such that, after receiving the coded common data word, it recovers the power control information (6) by means of appropriate decoding and, in the process, determines an
5 estimated value for the power control information on the basis of the value obtained by the logic operation from the corresponding bit in the coded common data word.

10 23. The radio system as claimed in one of claims 13-22,
characterized
in that the radio system is a CDMA mobile radio system.

15 24. The radio system as claimed in claim 23,
characterized
in that the receiver (1) which produces the coded binary power control information (6) is a base station in the mobile radio system, and the transmitter (2)
20 which receives the power control information and sets its transmission power appropriately is a mobile station in the mobile radio system.

BOX PCT
IN THE UNITED STATES ELECTED/DESIGNATED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

SUBMISSION OF DRAWINGS

APPLICANTS: Bernhard Raaf

DOCKET NO: 112740-344

SERIAL NO:

GROUP ART UNIT:

10

EXAMINER:

INTERNATIONAL APPLICATION NO:

PCT/DE00/01021

INTERNATIONAL FILING DATE:

03 April 2000

INVENTION: METHOD FOR CONTROLLING TRANSMISSION POWER
IN A RADIO SYSTEM, AND A CORRESPONDING RADIO
SYSTEM

15

Assistant Commissioner for Patents,
Washington, D.C. 20231

20 Sir:

Applicants herewith submit two sheets (Figs. 1-3) of drawings for the above-
referenced PCT application.

Respectfully submitted,

25




(Reg. No. 39,056)

William E. Vaughan
Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, Illinois 60690-1135
(312) 807-4292
Attorneys for Applicants

30

1/2

FIG 1

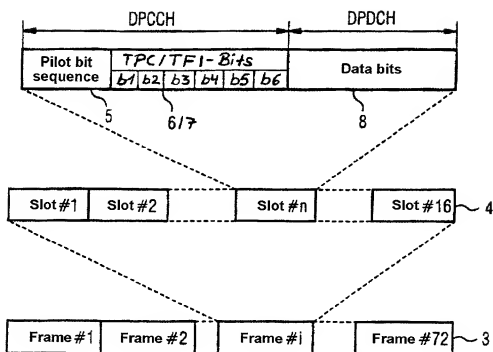

2/2

FIG 2





FIG 3 (PRIOR ART)

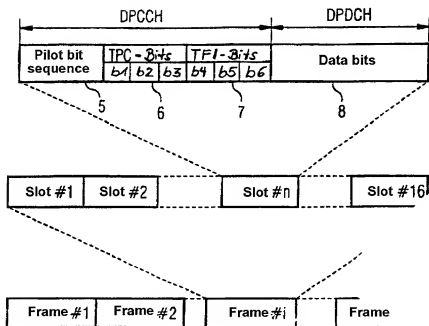

Declaration and Power of Attorney For Patent Application

Erklärung Für Patentanmeldungen Mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit
an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine
Staatsangehörigkeit den im Nachstehenden nach
meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are
as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste
und alleinige Erfinder (falls nachstehend nur ein Name
angegeben ist) oder ein ursprünglicher, erster und
Miterfinder (falls nachstehend mehrere Namen
aufgeführt sind) des Gegenstandes bin, für den dieser
Antrag gestellt wird und für den ein Patent beantragt
wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only
one name is listed below) or an original, first and joint
inventor (if plural names are listed below) of the
subject matter which is claimed and for which a patent
is sought on the invention entitled

Verfahren zur Regelung der
Sendeleistung in einem Funksystem und
entsprechendes Funksystem

Method for regulating the transmitter
power in a radio system and
corresponding radio system

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)

(check one)

☐ hier beigefügt ist.

☐ is attached hereto.

☒ am 03.04.2000 als

☒ was filed on 03.04.2000 as

PCT internationale Anmeldung

PCT international application

PCT Anmeldungsnummer PCT/DE00/01021

PCT Application No. PCT/DE00/01021

eingereicht wurde und am
abgeändert wurde (falls tatsächlich abgeändert).

and was amended on
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen
Patentanmeldung einschliesslich der Ansprüche
durchgesehen und verstanden habe, die eventuell
durch einen Zusatzantrag wie oben erwähnt abgeän-
dert wurde.

I hereby state that I have reviewed and understand the
contents of the above identified specification, including
the claims as amended by any amendment referred to
above.

Ich erkenne meine Pflicht zur Offenbarung irgendwel-
cher Informationen, die für die Prüfung der vorliegen-
den Anmeldung in Einklang mit Absatz 37, Bundes-
gesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind,
an.

I acknowledge the duty to disclose information which is
material to the examination of this application in
accordance with Title 37, Code of Federal Regulations,
§1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile
gemäss Abschnitt 35 der Zivilprozessordnung der
Vereinigten Staaten, Paragraph 119 aller unten ange-
gebenen Auslandsanmeldungen für ein Patent oder
eine Erfindersurkunde, und habe auch alle Auslands-
anmeldungen für ein Patent oder eine Erfindersurkun-
de nachstehend gekennzeichnet, die ein Anmelde-
datum haben, das vor dem Anmeldedatum der
Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35,
United States Code, §119 of any foreign application(s)
for patent or inventor's certificate listed below and have
also identified below any foreign application for patent
or inventor's certificate having a filing date before that
of the application on which priority is claimed:

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)



29177

And I hereby appoint

Customer No. 29177

PATENT & TRADEMARK OFFICE

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

Ext. _____

Postanschrift:

Send Correspondence to:

Bell, Boyd & Lloyd LLC
Three First National Plaza, 70 West Madison Street, Suite 3300 60602-4207 Chicago, Illinois
Telephone: (001) 312 372 11 21 and Facsimile (001) 312 372 20 98

or

Customer No. 29177

Voller Name des einzigen oder ursprünglichen Erfinders:		Full name of sole or first inventor:	
BERNHARD RAAF		BERNHARD RAAF	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
<i>Bernhard RAAF</i>	8.10.07		
Wohnsitz		Residence	
MUENCHEN, DEUTSCHLAND	DEX	MUENCHEN, GERMANY	
Staatsangehörigkeit		Citizenship	
DE		DE	
Postanschrift		Post Office Address	
MAXHOFSTR. 62		MAXHOFSTR. 62	
81475 MUENCHEN		81475 MUENCHEN	
Voller Name des zweiten Miterfinders (falls zutreffend):		Full name of second joint inventor, if any:	
Unterschrift des Erfinders	Datum	Second inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

German Language Declaration

Prior foreign applications
Priorität beansprucht

Priority Claimed

19918372.4

DE

22.04.1999

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☒ ☐
Yes No
Ja Nein

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐ ☐
Yes No
Ja Nein

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐ ☐
Yes No
Ja Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/01021
(Application Serial No.)
(Anmeldeseriennummer)

03.04.2000
(Filing Date D, M, Y)
(Anmeldedatum T, M, J)

anhängig
(Status)
(patentiert, anhängig,
aufgegeben)

pending
(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date D,M,Y)
(Anmeldedatum T, M, J)

(Status)
(patentiert, anhängig,
aufgeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.